


Adjusting top

- Check setting of top and correct if necessary to restore seal and prevent wind noises (the front edge of the top -1- must come to rest approx. 5 mm -arrows- below the windscreen frame -2-).



- Open the top and undo the Torx screw -T20-- 1- (self-locking, 5 Nm) for the locking hook -2-.
- Set the locking hooks -2- on left and right and retighten the Torx screws.
- Check the door window setting and correct it if necessary → [Chapter](#).

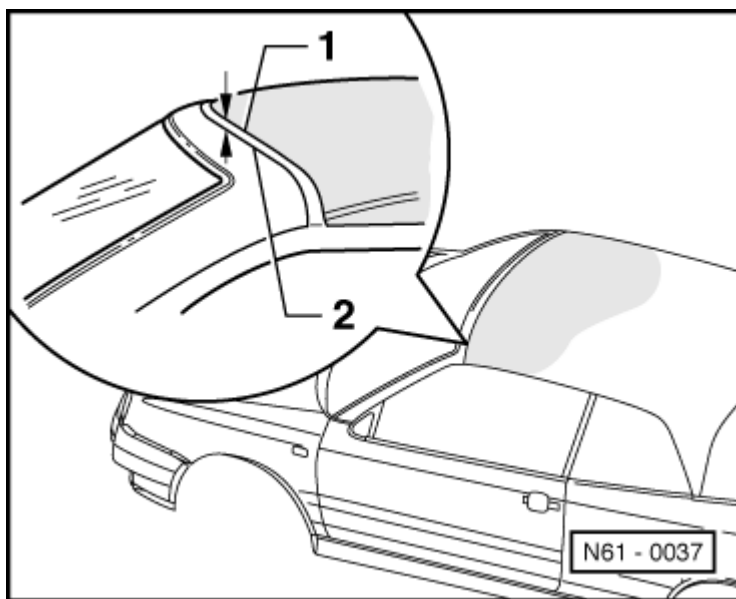