

Raising vehicle with lifting platform and trolley jack

Safety notes



WARNING

- ◆ *Before driving onto a lifting platform, ensure that there is sufficient clearance between low-lying vehicle components and lifting platform.*
- ◆ *Before driving a vehicle onto a lifting platform it must be ensured that the vehicle weight does not exceed the permissible lifting capacity of the platform.*
- ◆ *Vehicle may be lifted only at points indicated in figure to avoid damaging vehicle floor pan or tipping vehicle.*
- ◆ *Never start engine and engage a gear with vehicle lifted as long as even one driven wheel has contact with the floor! Disregarding these warnings risks the danger of an accident!*
- ◆ *If work is to be performed under vehicle, it must be supported by suitable stands.*
- ◆ *To prevent damage always use a suitable rubber or wooden block.*
- ◆ *On no account should vehicle be lifted at the engine sump, gearbox or on front or rear axle as this may cause serious damage.*


Lifting points for lifting platform and trolley jack

At front: On reinforcement welded on floor pan.



WARNING

The vehicle must not be lifted on vertical reinforcement of side member, otherwise serious damage may occur to the vehicle.

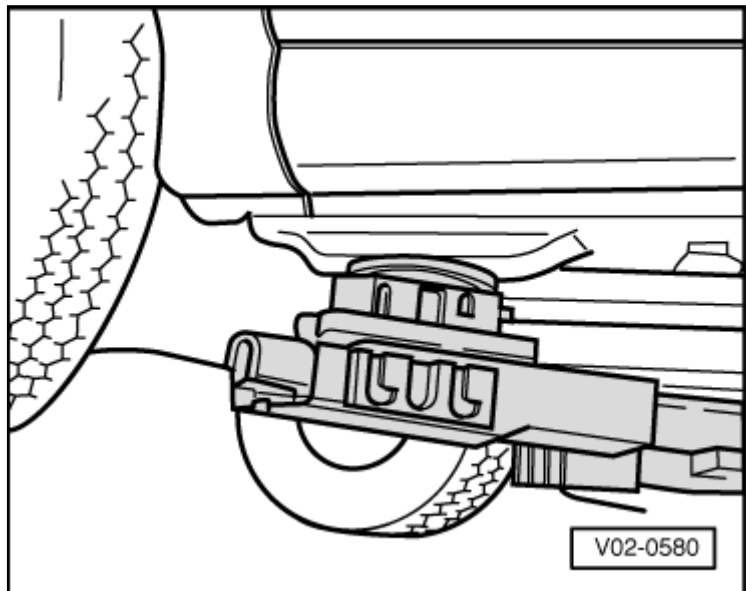

Rear: On side member vertical stiffener in area of marking for vehicle jack.

