

Golf/Vento

Current Flow Diagram

No. 23 / 1


Edition 09.1995

Dual headlights

From October 1991

Position of relays:

For alternatives to relay and fuse positions as well as multi-pin connector wiring - see "Fitting locations" section.

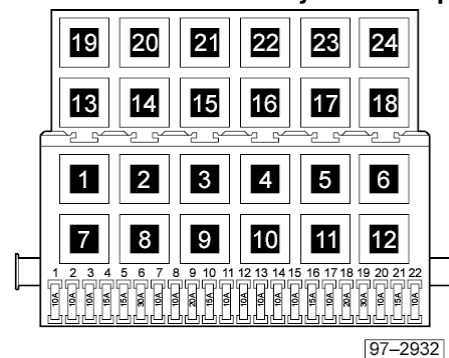

Note:

The number in brackets behind the part designation denotes the control number on the housing.



Fuse colours

- 30 A - green
- 25 A - white
- 20 A - yellow
- 15 A - blue
- 10 A - red

Golf/Vento

Current Flow Diagram

No. 23 / 2

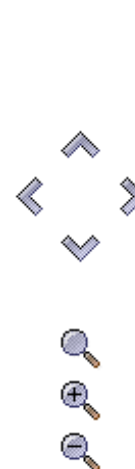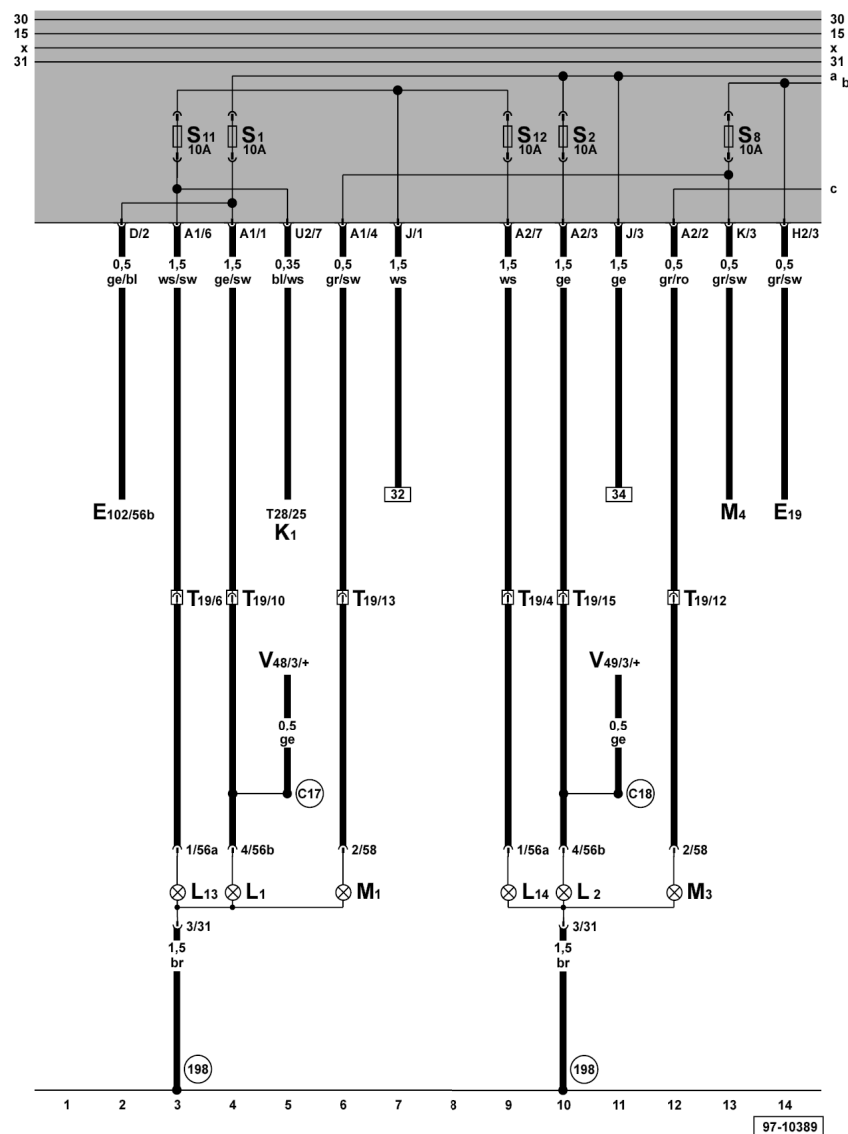

Headlights, side lights


- E19 - Parking light switch
- E102 - Headlight range control adjuster
- K1 - Main beam warning lamp
- L1 - Twin filament bulb, left
- L2 - Twin filament bulb, right
- L13 - Main beam bulb, left
- L14 - Main beam bulb, right
- M1 - Side light bulb, left
- M3 - Side light bulb, right
- M4 - Tail light bulb, left
- T19 - 19-pin connector, on right behind radiator grille
- T28 - 28-pin connector, on dash panel insert
- V48 - Headlight range control motor, left
- V49 - Headlight range control motor, right
- 198 - Earth connection, in front lighting wiring harness
- C17 - Connection (56b) -1-, in front lighting wiring harness
- C18 - Connection (56b) -2-, in front lighting wiring harness

ws = white
 sw = black
 ro = red
 br = brown
 gn = green
 bl = blue
 gr = grey
 li = purple
 ge = yellow
 or = orange
 rs = pink

97-10389

Current Flow Diagram

No. 23 / 3

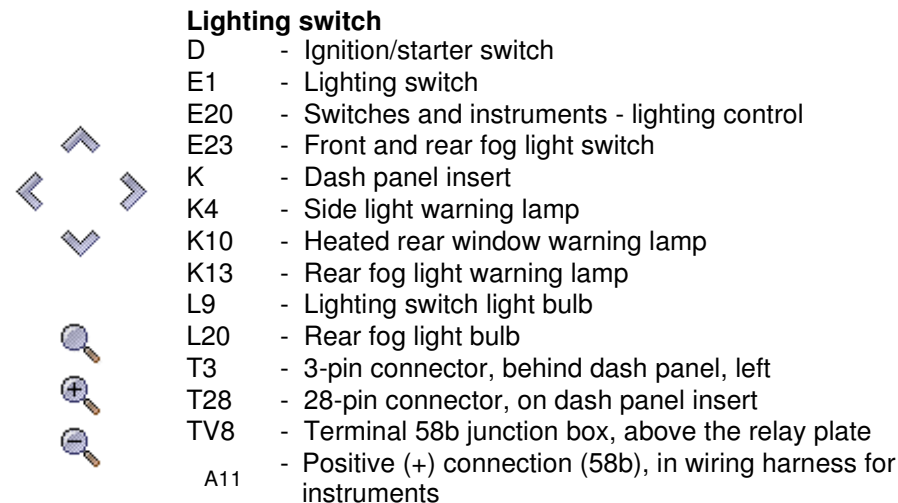


ws = white
sw = black
ro = red
br = brown
gn = green
bl = blue
gr = grey
li = purple
ge = yellow
or = orange
rs = pink

Golf/Vento

Current Flow Diagram

No. 23 / 4

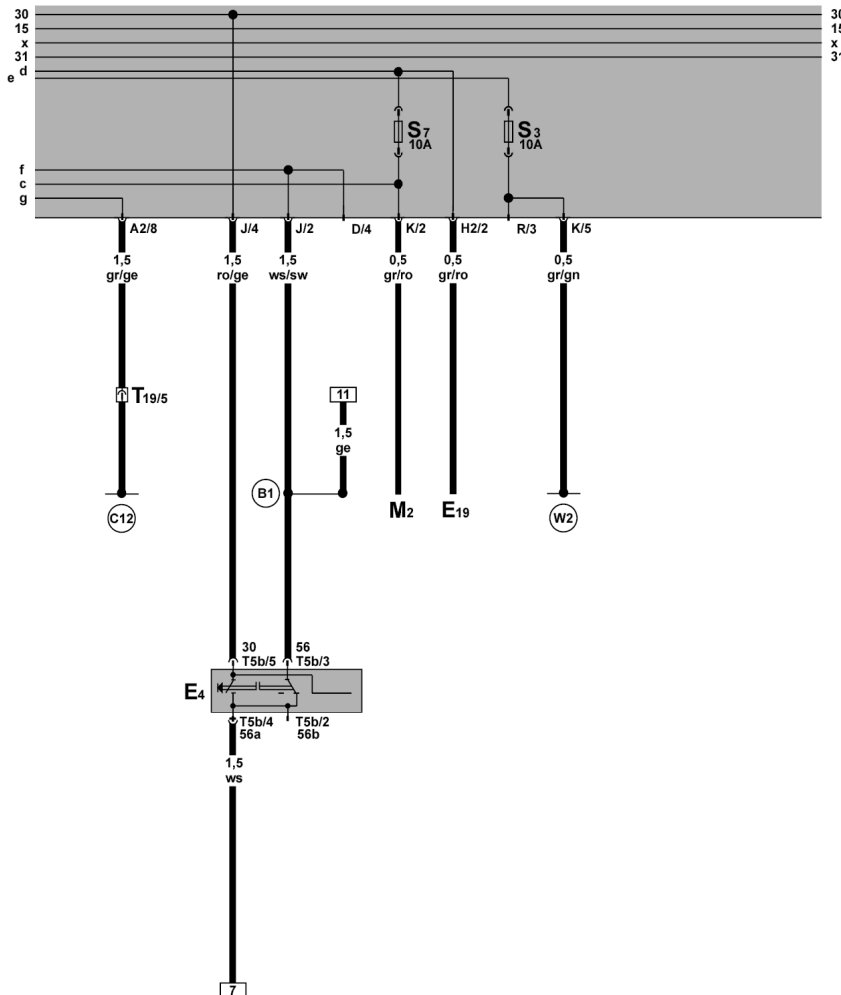

Headlight dipper/flasher switch

- E4 - Headlight dipper/flasher switch
- E19 - Parking light switch
- M2 - Tail light bulb, right
- T5b - 5-pin connector, behind steering column switch trim
- T19 - 19-pin connector, behind front lock carrier, centre
- B1 - Connection (56b), in steering column switch wiring harness
- C12 - Positive (+) connection -1-, in headlight wiring harness
- W20 - Positive (+) connection (58), in rear wiring harness

ws = white
 sw = black
 ro = red
 br = brown
 gn = green
 bl = blue
 gr = grey
 li = purple
 ge = yellow
 or = orange
 rs = pink

29 30 31 32 33 34 35 36 37 38 39 40 41 42

97-11603